


Download our software at www.digitronicgas.com in the „Technical Support Service” area or click below:

[Digitronic Multipoint software](#)

Click for more info

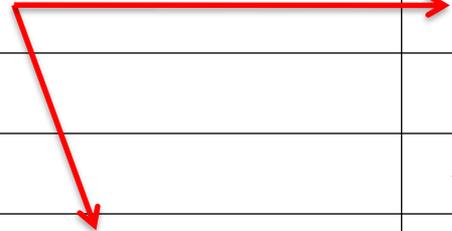

	MP32	MP48	MP48 OBD	MP6C	2568D
Number of cylinders	2/3/4	2/3/4	2/3/4	5/6	5/6/8
Operating temperature	-40 / +105 °C	-40 / +105 °C	-40 / +105 °C	-40 / +110 °C	-40 / +120 °C
Progressive petrol to gas switch (smooth transition)	X	✓	✓	✓	✓
Split fuel option on engine load	X	✓	✓	✓	✓
Engine RPM reading from any ignition coil	X	✓	✓	✓	✓
Gas temperature management	X	✓	✓	✓	✓
Advanced Autocalibration (automatic Map adjusting)	✓	✓	✓	✓	X
Petrol addition management	X	✓	✓	✓	✓
Gas injectors enable/disable for diagnostic purpose	X	✓	✓	✓	✓
Lambda probe reading and emulation	X	just reading one channel	one channel	two channels	two channels
Linear Lambda probe emulation (UEGO)	X	X	✓	✓	✓
OBD II Adaptivity	X	X	✓	✓	✓